


# TKS-160 SKID



**INCLUDED**

**R.O.T. SYSTEM**  
Electric Tilting System

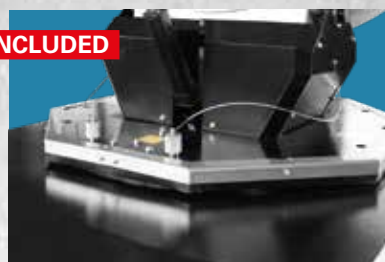

**INCLUDED**

**R.O.T. SYSTEM**  
Automatic Oscillation 340 °



**INCLUDED**

**R.O.T. SYSTEM**  
Remote Control 50mt range



# TKS-160 SKID

Ideal for large outdoor areas, fully automatic, used for the most demanding applications, large mines and large demolition areas. Usefull also for sterilization and sanitation.

## R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

## STANDARD FEATURES

- SMART START SYSTEM
- Emergency stop button
- Separate electric cabinet
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Lifting eye
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crowns with 72 nozzles
- Automatic Water drain system
- Mounted on base with forklift pockets

## OPTIONS

- 60 Hz
- External pump for chemicals additives



LIFTING EYE



Stainless steel crowns with 72 NOZZLES



Mounted on **BASE** with forklift pockets



Safety **PRESSURE SWITCH**



**COVERAGE** without wind 150-160m

## TECHNICAL DATA

Electric engine power	kW	150	Water inlet filter	Mesh	60
Water consumption	l/m	160 - 180	Y Filter	µm	500
Coverage (without wind)	m	150 - 160	Electric Tilting system	-	0 - 35°
Max. water throw height	m	50	Automatic oscillation	-	0 - 340°
Water connection	-	UNI 45 or STORZ or CAMLOCK	Dimensions	mm	2800 x 2600 x 2450
Min. inlet Water pressure	bar	1.0	Weight	Kg	3370

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

