


TKS-40

HYDRAULIC DRIVEN




INCLUDED

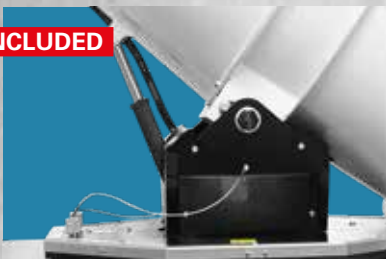

R.O.T. SYSTEM
Electric Tilting System

INCLUDED

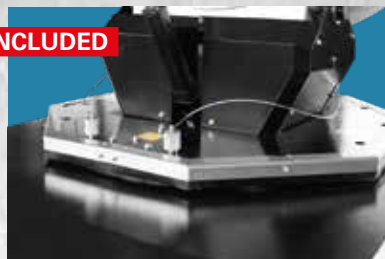

R.O.T. SYSTEM
Automatic Oscillation 340 °

INCLUDED



R.O.T. SYSTEM
Remote Control 50mt range



TKS-40

HYDRAULIC DRIVEN



Ideal for medium/large size outdoor areas. Fully automatic, **equipped with Hydraulic generator**, used in demolition and with predisposition to be connected to telehandlers.

R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

STANDARD FEATURES

- Integrated control panel
- **Hydraulic generator (included)**
- SMART START SYSTEM
- Emergency stop button
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Central lifting eye
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crown with 24 nozzles
- Skid base with forklift pockets

OPTIONS

- 60 Hz
- External pump for chemicals additives
- 2000 lt water tank with pump on skid
- 2000 lt water tank with pump on site tow trailer
- Reel winder for water pipe



HYDRAULIC GENERATOR included



Integrated CONTROL PANEL



Central LIFTING EYE



Safety PRESSURE SWITCH



TECHNICAL DATA

Electric engine power	kW	7,5	Water inlet filter	Mesh	60
Fan diameter	mm	900	Y Filter	µm	500
Water consumption	l/m	37 - 43	Electric Tilting system	-	0 - 35°
Coverage (without wind)	m	30 - 40	Automatic oscillation	-	0 - 340°
Max. water throw height	m	10	Dimensions	mm	1719 x 1345 x 2065
Water connection	-	UNI 45 or STORZ or CAMLOCK	Weight	Kg	850
Min. inlet Water pressure	bar	1.0	Hydraulic generator included	kVA	12
			Secondary Hydraulic circuit	-	40 l - 140/150 bar

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

