

TKS-40

TRAILER POWER TANK




INCLUDED



R.O.T. SYSTEM
Electric Tilting System

INCLUDED

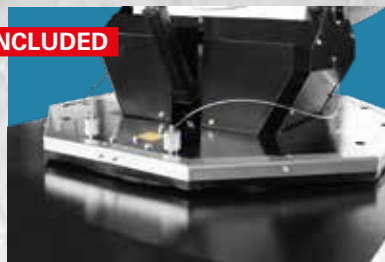

R.O.T. SYSTEM
Automatic Oscillation 340 °

INCLUDED



R.O.T. SYSTEM
Remote Control 50mt range



TKS-40

TRAILER POWER TANK



Thanks to the integrated tank and generator, is perfect for areas where it is not possible to find water and electricity. Usefull also for sterilization and sanitation.

R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

STANDARD FEATURES

- Integrated control panel
- Emergency stop button
- Safety Automatic clutch compliant with HSE norm
- 2000 lt stainless still water tank
- Water pump
- 20 kVA integrated generating set
- Water Safety floating switch
- Double Axle Site tow trailer
- SMART START SYSTEM
- Stainless stell crown with 24 nozzles
- Automatic Water drain system
- Lifting eyes
- 4 high adjustable stabilizers
- Forklift pockets
- Equipped with big size wheels for off-road site

OPTIONS

- 60 Hz
- External pump for chemicals additives



Central **LIFTING EYE**



Integrated **CONTROL PANEL**



Bigger size **WHEELS** for off-road sites



Safety **PRESSURE SWITCH**



Stainless steel crown with **24 NOZZLES**



FAN diameter 900mm

TECHNICAL DATA

TECHNICAL DATA						Generator			
Electric engine power	kW	7,5	Y Filter	µm	300	Power	kVA	20	
Coverage (without wind)	m	30 - 40	Oscillation	-	0 - 340°	Engine (Yanmar)	4TNV88-BIB		
Max. water throw height	m	10	Tilting angle	-	0 - 35°	Rpm	1500		
Water connection	-	UNI 45 or STORZ or CAMLOCK	Stainless water tank	l	2000	Fuel	Diesel		
Water consumption	l/m	37 - 43	Fan diameter	mm	900	Fuel tank	l	130	
Water inlet filter	mesh	1600	Dimensions	mm	4430x2260x2463	Fuel consumption	l/h	5	
			Weight	Kg	2525	Average running time	h	26	

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

