

# TKS-50 SKID




**INCLUDED**



**R.O.T. SYSTEM**  
Electric Tilting System

**INCLUDED**

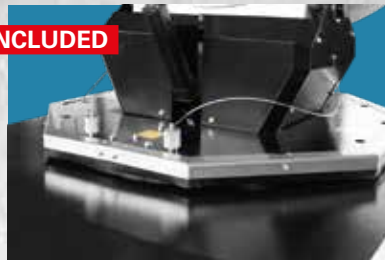

**R.O.T. SYSTEM**  
Automatic Oscillation 340 °

**INCLUDED**



**R.O.T. SYSTEM**  
Remote Control 50mt range



# TKS-50 SKID



Ideal for medium/large size outdoor areas. Fully automatic, used in mines, quarries and demolition, recycling and odor removal. Useful also for sterilization and sanitation.

## R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

## STANDARD FEATURES

- Integrated control panel
- SMART START SYSTEM
- Emergency stop button
- Phase inverter
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Manual water drain system
- Central lifting eye
- Forklift pockets
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crown with 24 nozzles
- Galvanized SKID base with forklift pockets

## OPTIONS

- 60 Hz
- External pump for chemicals additives



Central **LIFTING EYE**



Integrated **CONTROL PANEL**



**SKID BASE** with forklift pockets



Safety **PRESSURE SWITCH**



**Stainless steel crown** with **24 NOZZLES**



**FAN diameter 900mm**

## TECHNICAL DATA

Electric engine power	kW	15	Generator required	kVA	20
Inlet plug	-	400V 3P+N+T 50Hz 32 A	Water inlet filter	Mesh	60
Fan diameter	mm	900	Y Filter	µm	500
Water consumption	l/m	37 - 43	Electric Tilting system	-	0 - 35°
Coverage (without wind)	m	40 - 50	Automatic oscillation	-	0 - 340°
Max. water throw height	m	15	Dimensions	mm	1719 x 1345 x 2065
Water connection	-	UNI 45 or STORZ or CAMLOCK	Weight	Kg	790
Min. inlet Water pressure	bar	1.0			

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

