

# TKS-50




**INCLUDED**



**R.O.T. SYSTEM**  
Electric Tilting System

**INCLUDED**

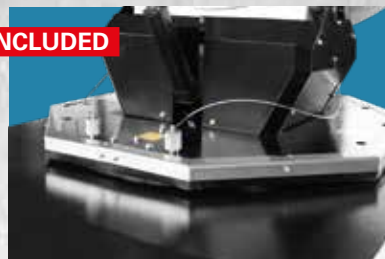

**R.O.T. SYSTEM**  
Automatic Oscillation 340 °

**INCLUDED**



**R.O.T. SYSTEM**  
Remote Control 50mt range



# TKS-50



Ideal for medium/large size outdoor areas. Fully automatic, used in mines, quarries and demolition, recycling and odor removal. Useful also for sterilization and sanitation.

## R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

## STANDARD FEATURES

- Integrated control panel
- SMART START SYSTEM
- Emergency stop button
- Phase inverter
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Manual water drain system
- Central lifting eye
- Forklift pockets
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crown with 24 nozzles
- 3 height adjustable stabilizers
- Equipped with big size wheels for off-road site

## OPTIONS

- 60 Hz
- External pump for chemicals additives
- Front jockey wheel



**FOLDABLE TOWBAR**  
35% yard and loading save



Integrated **CONTROL PANEL**



Bigger size **WHEELS** for off-road sites



Safety **PRESSURE SWITCH**



Stainless steel crown with **24 NOZZLES**



**FAN** diameter 900mm

## TECHNICAL DATA

Electric engine power	kW	15	Generator required	kVA	20
Inlet plug	-	400V 3P+N+T 50Hz 32 A	Water inlet filter	Mesh	60
Fan diameter	mm	900	Y Filter	µm	500
Water consumption	l/m	37 - 43	Electric Tilting system	-	0 - 35°
Coverage (without wind)	m	40 - 50	Automatic oscillation	-	0 - 340°
Max. water throw height	m	15	Dimensions min.	mm	2077 x 1836 x 2230
Water connection	-	UNI 45 or STORZ or CAMLOCK	Dimensions max	mm	2877 x 1836 x 2230
Min. inlet Water pressure	bar	1.0	Weight	Kg	840

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

