

TKS-80 SKID




INCLUDED



R.O.T. SYSTEM
Electric Tilting System

INCLUDED

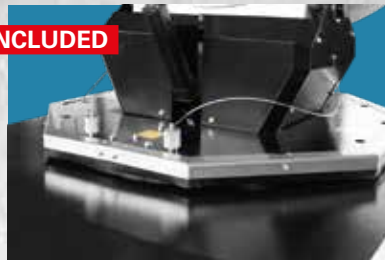

R.O.T. SYSTEM
Automatic Oscillation 340 °

INCLUDED



R.O.T. SYSTEM
Remote Control 50mt range



TKS-80 SKID



Ideal for large outdoor areas, fully automatic, used for the most demanding applications, large mines and large demolition areas. Usefull also for sterilization and sanitation.

R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

STANDARD FEATURES

- Integrated control panel
- SMART START SYSTEM
- Emergency stop button
- Separate cabinet
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Manual water drain system
- Lifting eye
- Forklift pockets
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crown with 36 nozzles
- Galvanized SKID base with forklift pockets

OPTIONS

- 60 Hz
- External pump for chemicals additives



LIFTING EYE



Integrated CONTROL PANEL



Galvanized SKID BASE with forklift pockets



Safety PRESSURE SWITCH



Stainless steel crown with 36 NOZZLES



FORKLIFT POCKETS

TECHNICAL DATA

Electric engine power	kW	45	Generator required	kVA	90
Inlet plug	-	400V 3P+N+T 50Hz 125 A	Water inlet filter	Mesh	60
Fan diameter	mm	1050	Y Filter	µm	500
Water consumption	l/m	115 - 130	Electric Tilting system	-	0 - 35°
Coverage (without wind)	m	70 - 80	Automatic oscillation	-	0 - 340°
Max. water throw height	m	30	Dimensions	mm	2238 x 1493 x 2389
Water connection	-	UNI 45 or STORZ or CAMLOCK	Weight	Kg	1460
Min. inlet Water pressure	bar	1.0			

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

