


TKS-NEBU





TKS-NEBU

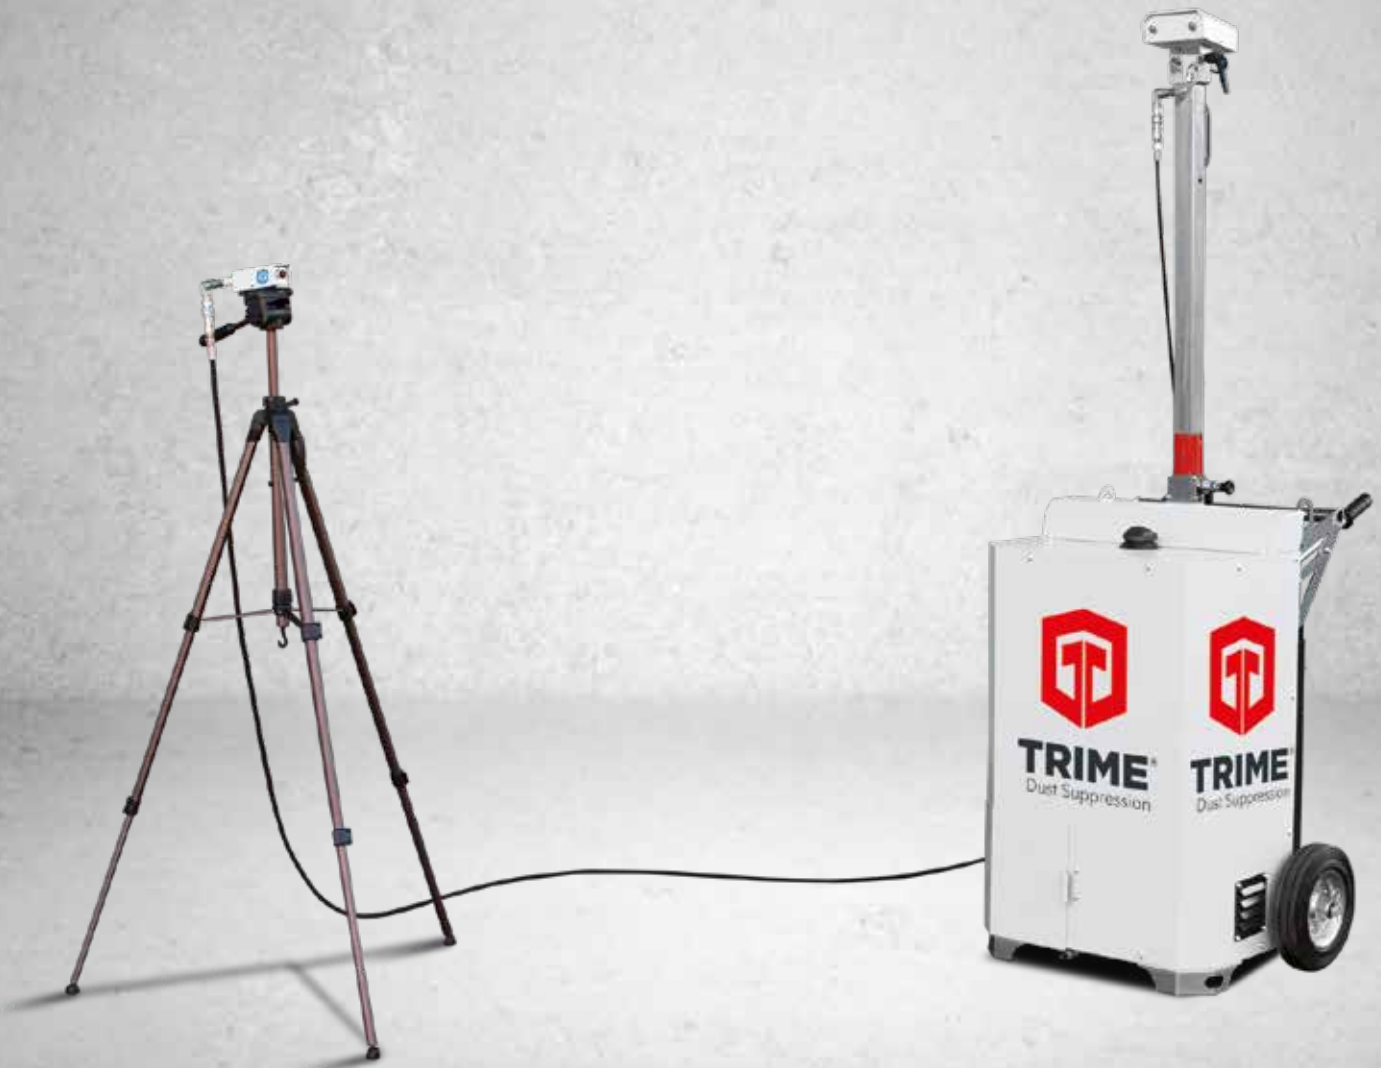

Portable unit able to spray the nebulized water up to 7 metres. Ideal for indoor jobs, small and indoor demolitions and renewals. It's also ideal for asbestos removal, sterilization and sanitation

- Compact dimensions
- Easy to handle

STANDARD FEATURES

- Stainless steel 70 litres water tank
- Wheels and handles for transport
- High pressure pump
- Signal for low water level
- Closable for an easy transport
- Manually adjustable nozzles spray angle

OPTIONS

- Connection from the water supply network



Manual **CONTROL PANEL**



REMOTE CONTROL on / off



NOZZLE

TECHNICAL DATA

Water pump	-	230V – 50Hz – 0.55kW – 80 bar	Coverage	m	7 (area 64 sqm)
Nozzles spray angle	-	da 60° a 100°	Dimensions min.	mm	815 x 530 x 1400 h
Tilting angle	-	-20° / 30°	Dimensions max.	mm	815 x 530 x 2200 h
Single phase power	kW	0.6 (230V)	Dimensions satellite min.	mm	20 x 20 x 1200 h
Water tank capacity	l	70	Dimensions satellite max.	mm	60 x 60 x 2100 h
Tank autonomy	hrs	2,30	Dry weight	Kg	120

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.

